



TECHNICAL BULLETIN FS-C5015N/C5025N

SUBJECT:

BULLETIN INDEX

11/20/06

SUBJECT:

BULLETIN #

NEW MODEL PRODUCT INFORMATION 1

TABLE OF CONTENTS

INTRODUCTION	1
GENERAL INFORMATION	1
DEALER LIMITED WARRANTY	2
MAINTENANCE KIT LIMITED WARRANTY	2
LABOR REINBURCEMENT	3
PRODUCT TRAINING	3
MAXIMUM MONTHLY VOLUME.....	3
SERVICE DOCUMENTATION	3
ACCESSORY / OPTIONS	4
CONNECTIVITY ACCESSORIES	4
FS-C5015N YIELDS OF SUPPLY ITEMS & COST PER COPY.....	4
FS-C5025N YIELDS OF SUPPLY ITEMS & COST PER COPY.....	4
FS-C5015N FIRMWARE INFORMATION	5
FS-C5025N FIRMWARE INFORMATION	5
BOARD REPAIR INFORMATION	5
CONTROLLER MEMORY SPECIFICATIONS	6
MEMORY TYPE.....	6
MAINTENANCE KIT YIELDS & COST PER COPY	6
MK-542 MAINTENANCE KIT CONTENTS.....	6
FS-C5015N SPECIFICATIONS.....	7
SPECIFICATIONS (CONTINUED).....	8
FS-C5025N SPECIFICATIONS.....	9
SPECIFICATIONS (CONTINUED).....	10
BTU'S.....	11
POWER CONSUMPTION	11
INSTALLATION REQUIREMENTS	12
WEIGHT AND DIMENSIONS	12
MACHINE SPACE REQUIREMENTS	12
UTILITIES	13
PRODUCT CONFIGURATION	14
PRODUCT COMPARISON	15

**RECOMMENDED ACTION FOR FIELD MACHINES**

- | | |
|-----------------------------------|--|
| ☐ AT SETUP | ☐ NEXT SERVICE CALL |
| ☐ NEXT PM | ☒ INFORMATION ONLY |

TECHNICAL BULLETIN FS-C5015N/C5025N



Bulletin # FS-C5015N/C5025N-01	Model FS-C5015N/C5025N	Date 11/20/06
Updated Serial Number From introduction		
Subject NEW MODEL PRODUCT INFORMATION		
This technical publication is confidential information that is the property of Kyocera Mita America, Inc. It is solely for the use of Kyocera Mita's authorized dealers. This information may not be published, reproduced, sold, or copied in any media. Its unauthorized use is prohibited. Copyright © 2006 by Kyocera Mita America, Inc. All rights reserved.		

INTRODUCTION

Kyocera is pleased to announce the launch of the FS-C5015N/C5025N. The FS-C5015N produces 17 (LTR) pages per minute in both B&W and Full Color. The FS-C5025N produces 22 (LTR) pages per minute in both B&W and Full Color. Both Models provide high productivity, high image quality and standard network capability.

Key Features of the FS-C5015N/C5025N are as follows:

- FS-C5015N: 17 CPM Color/B &W (Letter)
- FS-C5025N: 22 CPM Color/B &W (Letter)
- FS-C5015N/Print Controller, PowerPC750Cxr 400MHz
- FS-C5025N/ Print Controller, PowerPC750FX 500MHz
- 128MB DDR SDRAM Standard Printer Memory
Expandable to 640MB
- 600 DPI Print Resolution
- Standard Network Interface
- High Speed USB 2.0
- Optional Duplex Unit
- Energy Star Compliant



FS-C5025 with
optional paper
drawers

GENERAL INFORMATION

Product Name	FS-C5015N/C5025N
Product Code	2HJ/2HKxxx
Product Training	Learning Center on KMAconnect
Diagnostic Center Contact Number	1-800-255-6482
Software Solution Group Email	software_solution@kyoceramita.com
KMAconnect Web Site	kmaconnect.com
KMAconnect Help Desk	dealersupport@kyoceramita.com
Kyocera Mita Web Site	kyoceramita.com
Kyocera Technical Support (Email)	Kmaconnect.com
Material Safety Data Sheet Requests	Posted on KMAconnect
National Processing Center (Customer Service)	1-866-596-2372 or customer_service@kyoceramita.com
National Training Center	training@kyoceramita.com

**DEALER LIMITED WARRANTY
FOR KYOCERA BRAND
MULTIFUNCTIONAL PRODUCTS AND PRINTERS**

Kyocera Mita America, Inc. ("Kyocera") warrants to its Authorized Dealers that its new Multifunctional Products / Printers (both referred to herein as "MFP/Printers") will be free from defects in workmanship and material under normal use and service for a period of 12 months from installation with first end-user, or 15 months from Kyocera's invoice date to Dealer, or the specified number of copies/prints **as listed in the Policy and Procedures Manual on KMAconnect**, whichever is earlier. Kyocera obligation hereunder is expressly limited to providing Dealer with the parts required to repair the MFP/Printer or crediting Dealer's account for the cost of said parts, at Kyocera's election. Maintenance Kits, lamps, exterior covers, consumable parts, and all labor costs, are specifically excluded from this warranty.

This warranty does not cover MFP/Printer, which: (a) have become damaged due to operator negligence, misuse, accidents, improper storage or unusual physical or electrical stress, (b) have used parts or supplies which are not genuine Kyocera brand parts or supplies, (c) have been serviced by a technician not employed by Kyocera or an Authorized Kyocera Dealer (d) have had the serial number modified, altered, or removed, or (e) **Dealer fails to register the installation information for the MFP/Printer with Kyocera utilizing KMAconnect.**

THIS WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES AND CONDITIONS, EXPRESS OR IMPLIED, AND KYOCERA SPECIFICALLY DISCLAIMS ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY SHALL NOT EXTEND TO, AND KYOCERA SHALL NOT BE LIABLE FOR, ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY ARISE OUT OF THE USE OF, OR INABILITY TO USE, THE MFP/PRINTER.

MAINTENANCE KIT LIMITED WARRANTY

Kyocera Mita America, Inc. and Kyocera Mita Canada Ltd. (both referred to as "Kyocera") warrant your new maintenance kit against any defects in material and workmanship for a period of three (3) years or the defined number of prints **listed in the Policy and Procedures Manual on KMAconnect**, whichever occurs first, from the date of customer installation. In the event any unit of your maintenance kit is found to be defective within the warranty period, Kyocera's only obligation and your exclusive remedy shall be the exchange or repair, at Kyocera's option, of the unit. The warranty period for any replaced maintenance kit unit will expire at the end of the original warranty. It is understood that Kyocera shall have no obligation to furnish labor.

This warranty is valid only for original retail purchaser (the "Purchaser") of a new maintenance kit in the United States of America or Canada, based upon the country of purchase.

*** Please refer to the Policies and Procedure Manual on KMAconnect more details on Maintenance Kit Warranty information.**

There is no Maintenance Kit for the FS-C5015N



225 Sand Road P.O. Box 40008
Fairfield, New Jersey 07004-0008, USA

LABOR REIMBURSEMENT

An Authorized Kyocera Dealer will receive labor reimbursement and parts replacement for warranty repairs performed by its Kyocera Certified Technician. ***Labor reimbursement is available for all FS Series Printer Models for a period of 12 months from installation with first end-user, or 15 months from Kyocera Mita America's invoice date to the dealer, or the specific number of copies/prints, whichever first occurs.*** Labor reimbursement is made in the form of a credit to the Dealer's Kyocera Account Number.

Please refer to the Policy and Procedures Manual on KMAconnect for more details on our Labor Reimbursement policy

PRODUCT TRAINING

*Product Training	Automatic Certification
Prerequisites	FS-C5020/5030

- If you are FS-C5020/C5030 certified, you are automatically certified on the FS-C5015N/C5025N.

MAXIMUM MONTHLY VOLUME

MAX. MONTHLY VOLUME	
FS-C5015N	50,000 pages
FS-C5025N	85,000 pages

SERVICE DOCUMENTATION

Description	Part Number	Price
FS-C5015N/C5025N Service Manual Rev-1	2HK70761	\$20.00
FS-C5015N/C5025N Parts List Rev-1	2HK70771	\$10.00
PF-60 Service Manual	Available on KMAconnect	N/C
PF-60 Parts List	Available on KMAconnect	N/C
FS-C5015N/C5025/C5030 Operation Guide (Basic)	Available on KMAconnect	N/C
FS-C5015N/C5025/C5030 Operation Guide (Advanced)	Available on KMAconnect	N/C
EF-310 Installation Guide Rev-1.0	Available on KMAconnect	N/C

ACCESSORY / OPTIONS

ITEM	Part Number	Description
PF-60	083DD3KX	Paper Feeder (5025, Up to three, 5015, max one)
EF-310	1203KX0KL0	Envelope Feeder (5025 Only)
DU-301	1023JZ0UN0	Automatic Duplex Unit is compatible with the FS-C5015/C5025
PT-300	2D993210	FS-C5015N Face-Up Tray
PT-301	1202F40UN0	FS-C5025N Face-Up Tray
HD-ME5 ①	855D200101	40GB Hard Drive
SD-100-64B	82143064	100pin DDR SDRAM Printer Memory (64MB)
SD-100-128B	82143128	100pin DDR SDRAM Printer Memory (128MB)
SD-100-256B	82143256	100pin DDR SDRAM Printer Memory (256MB)
SD-100-512B	82143512	100pin DDR SDRAM Printer Memory (512MB)

① NOTE: To use the e-MPS system, (Quick Copy, Proof and Hold, Private Print & Stored Job) an optional hard disk must be installed in the printer. See page 2-18 in the Advanced Operation Guide for details on these functions. For details on hard drive installation see page 3-9. The RAM disk may also be used for the Proof-and-Hold and Private Print modes. See Using the RAM Disk on page 2-58 for details on RAM disk.

CONNECTIVITY ACCESSORIES

ITEM	Description	Part Number
IB-23	Network Card (10BaseT/100BaseTX)	1503K00000

The IB-11 is not compatible with the FS-C5015N/C5025N.

FS-C5015N YIELDS OF SUPPLY ITEMS & COST PER COPY

Description	Part Number	Yield / 5%	Price	CPC
Toner TK-522K 177g	1T02HJ0US0	6,000 pages/5% coverage	68.40	0.0114
Toner TK-522C 123g	1T02HJCUS0	4,000 pages/5% coverage	66.80	0.0167
Toner TK-522M 123g	1T02HJBUS0	4,000 pages/5% coverage	66.80	0.0167
Toner TK-522Y 123g	1T02FJAUS0	4,000 pages/5% coverage	66.80	0.0167

Note: A Starter Toner Cartridge is included with the FS-C5015N; yield is approx. 2K/Color 3K/Mono pages based upon 5% coverage.

FS-C5025N YIELDS OF SUPPLY ITEMS & COST PER COPY

Description	Part Number	Yield / 5%	Price	CPC
Toner TK-512K 231g	1T02F30US0	8,000 pages/5% coverage	\$52.50	0.006562
Toner TK-512C 231g	1T02F3CUS0	8,000 pages/5% coverage	\$79.50	0.009937
Toner TK-512M 231g	1T02F3BUS0	8,000 pages/5% coverage	\$79.50	0.009937
Toner TK-512Y 231g	1T02F3AUS0	8,000 pages/5% coverage	\$79.50	0.009937

Note: A Starter Toner Cartridge is included with the FS-/C5025N; yield is approx. 4,000 pages based upon 5% coverage.

FS-C5015N FIRMWARE INFORMATION

Version (Shown on the Status Page)	Description	Location	Availability
2HJ_A000.001.002	Engine	(Flash)	Available on KMAconnect
2HJ_3000.001.026	System		

If you require an Engine or Printer System Firmware Update, Firmware can be updated via Compact Flash. Buffalo Technology Compact Flash Cards are recommended and can be purchased from TechWorks at www.techworks.com.

FS-C5025N FIRMWARE INFORMATION

Version (Shown on the Status Page)	Description	Location	Availability
2HJ_A000.001.002	Engine	(Flash)	Available on KMAconnect
2HK_3000.001.023	System		

If you require an Engine or Printer System Firmware Update, Firmware can be updated via Compact Flash. Buffalo Technology Compact Flash Cards are recommended and can be purchased from TechWorks at www.techworks.com.

BOARD REPAIR INFORMATION

PCB NAME	NEW PCB P/N	REPAIR PCB P/N	REPAIR PCB PRICE *
PWB Main Kit 5015	302HJ80100	855RB00063	\$257.12
PWB Main Kit 5025	302HK80060	855RB00064	\$274.65
PWB Ass'y Engine with Software (SP) 5015	302HJ01130	855RB00065	\$111.14
PWB Ass'y Engine with Software (SP) 5025	302HK01090	855RB00066	\$111.50
Switching Regulator 5015	302D945020	855RB00067	\$77.91
Switching Regulator 5025	302GV45010	855RB00068	\$75.83

*** Repair PCB Price includes credit issued after return of old Board.**

Defective PCB's being returned within the 1-Year warranty period must be returned to the **National Return Center** utilizing the **Online Return Authorization Request Form** on KMAconnect. A copy of this form must be filled out completely and be returned with the Circuit Board for Credit. Any associated mounting brackets, hardware, system software and original packaging must be included with the claim. Credit will then be issued to your account.

Defective PCB's out of warranty may be returned for repair to the **National Return Center** using the **Online Repair Board Core Form**.

All Part Numbers and Pricing subject to change without notice.

CONTROLLER MEMORY SPECIFICATIONS

The FS-C5015N/C5025N is standard-equipped with 128MB of standard DDR Memory. It can be upgraded to a maximum of 640MB by adding one 512MB DIMM.

Memory Type	Standard	Maximum
Printer Memory	128MB Built-in	128MB + 512MB DDR DIMM = 640MB

MEMORY TYPE

Item	Specification
Type & Number of Pins	100 pin DDR DIMM

Optional Memory is also available from TechWorks at (www.techworks.com).

MAINTENANCE KIT YIELDS & COST PER COPY

Description	Part Number	Yield / 5%	Price	CPC
MK-542 for FS-5025N (Maintenance Kit)	1702HK2US0	200,000 counts	451.00	0.002255

Note: There is no Maintenance Kit available for the FS-C5015N.

MK-542 MAINTENANCE KIT CONTENTS

Description	Part Number	Qty	Yield
DK-521 Drum Unit	302HK93010	4	200K Images
DV-512Y Developer Unit	302F393131	1	
DV-512M Developer Unit	302F393141	1	
DV-512C Developer Unit	302F393151	1	
DV-512K Developer Unit	302F393161	1	
TR-521	302HK93060	1	
FE-510	302F393061	1	
FK-521 (U)	302HK93050	1	
Ozone Filter	5MVB661XF001	2	
CL-510	302F393200	1	
Retard Roller	5AAVR0LL+052	1	
Holder Retard	5MVX644DN001	1	
Roller M/P Ass'y	5AAVR0LL+051	1	

Note: Each LED Print Head must be switched to the new Drum Unit (DK-521x 4). Use CAUTION when switching the LED Print Head. Be sure to follow the *Color Registration* Procedure included with each FS-C5015N/C5025N at setup, when the Print Heads are touched, cleaned or replaced during maintenance, or anytime the machine is moved. Refer to page 1-5-15 in the Service Manual for LED Print Head Assembly and Disassembly details.

See Chapter 5 in the Operation Guide for General End User Maintenance.

FS-C5015N Specifications

Type	Desktop
Printing system	Electrophotographic four color (CMYK) printing using Advanced Beam Array
Paper type	Cassette: Plain, preprinted, bond, recycled, rough, letterhead, color, prepunched, high quality, and custom MP tray: Plain, transparency, preprinted, labels, bond, recycled, vellum, rough, letterhead, color, prepunched, envelope, cardstock, coated, thick, high quality, and custom
Paper sizes	Cassette: 8 1/2" × 14" (Legal), 8 1/2" × 11" (Letter) MP tray: 8 1/2" × 14" (Legal), 8 1/2" × 11" (Letter), Envelope #10, Envelope #9, Envelope #6, Envelope DL, Envelope C5, 16K.
Print speeds	Cassette: Letter-R: 17 pages/minutes Legal: 14 pages/minutes MP tray: Letter: 16 pages/minutes Legal: 13 pages/minutes
First print time	Standby mode: 16 seconds or less Sleep mode: 68 seconds or less
Warm-up time	Sleep mode: 80 seconds or less (room temperature 22 °C/71.6 °F, 60%RH) Power on: 80 seconds or less (room temperature 22 °C/71.6 °F, 60%RH)
Paper feed system	One universal cassette and one MP tray
Paper loading capacity	Cassette: 500 sheets (80 g/m ² , 0.11 μm) 16~28lb. Bond MP tray: 100 sheets (80 g/m ² , 0.11 μm) 16lb. bond~110lb. Index
Paper eject system	Face down: 250 sheets (80 g/m ² , 0.11 μm) 20lb., equipped with a face-down paper full sensor Face up: 250 sheets, Optional face-up tray PT-300 must be installed (100 sheets when the optional duplexer is installed)
Photoconductor	OPC drum (diameter 30 mm)
Charging system	Scorotron (positive charging)
Light source	LED
Developing system	Touch down development method Developer: Two-component
Transfer system	Toner replenishing: Automatic from the toner container Primary transfer: Transfer belt (negative-charged) Secondary transfer: Transfer roller (negative-charged)
Separation system	Small radius curvature separation
Fixing system	Heat roller system (Oilless) Heat roller (diameter 36 mm, 500 W halogen heater lamp) Pressure roller (diameter 36 mm, 350 W halogen heater lamp)
Charge erasing system	Exposure by eraser lamp (LED)
Cleaning system	Drum: Counter blade Primary transfer belt: Fur brush

Specifications (continued)

Controller hardware	CPU: Power PC750CXr (400 MHz) System ROM: 8 MB (32 Mbit × 2) Font ROM: 2 MB (16 Mbit × 1) Main RAM: 128 MB standard (DIMM); expanding up to 640 MB (512 MB × 1) at the maximum by adding optional expansion memory Optional expansion RAM (DIMM): 1 slot 100-pin DIMM (64, 128, 256 or 512 MB)
Interface	10/100BASE TX, USB: Hi-Speed USB Optional interface (KUIO-LV) × 1: Network interface card IB-23 (10 Base-TX/100 Base-TX) must be installed.
Controller software	a) Emulation PCL6 (PCL5c/PJL/PCL XL protocol class 2.1) KPD3 (PostScript 3 compatible) b) Fonts: Bitmap font: 1 Line Printer bitmap font Outline fonts: 80 PCL/KPD3 fonts c) Graphic: (1) Raster graphic: 75, 100, 150, 200*, 300, 600* dpi (*200 dpi is supported when the resolution is 600 dpi.) (2) Vector graphic: Line, Box, Circle, Arc, Fill pattern etc. (3) Bar code: One-dimensional bar code: 45 types Two-dimensional bar code: 1 type (PDF-417) d) Connectivity: Plug & Play, Windows 95/98/ME/NT4.0/2000/XP SNMP (KM-NET viewer)
Resolution	600 dpi
Dimensions	Main unit: 13 5/8 × 18 1/2" × 15 1/4" (W × D × H)
Weight	Main unit: 52 15/16 lbs (not including toner containers)
Power source	120 V AC, 60 Hz (U.S.A./Canada)
Current	9.2 A (120 V model)
Noise	Printing: 52 dB (A) Ready: 36 dB (A)

FS-C5025N Specifications

Type	Desktop
Printing system	Electrophotographic four color (CMYK) printing using Advanced Beam Array
Paper type	Cassette: Plain, preprinted, bond, recycled, rough, letterhead, color, prepunched, high quality, and custom MP tray: Plain, transparency, preprinted, labels, bond, recycled, vellum, rough, letterhead, color, prepunched, envelope, cardstock, coated, thick, high quality, and custom
Paper sizes	Cassette: 8 1/2" × 14" (Legal), 8 1/2" × 11" (Letter) MP tray: 8 1/2" × 14" (Legal), 8 1/2" × 11" (Letter), Envelope
Print speeds	Cassette: Letter-R: 22 pages/minutes Legal: 18 pages/minutes MP tray: Letter: 20 pages/minutes Legal: 16 pages/minutes
First print time	Standby mode: 13 seconds or less Sleep mode: 68 seconds or less
Warm-up time	Sleep mode: 68 seconds or less (room temperature 22 °C/71.6 °F, 60%RH) Power on: 68 seconds or less (room temperature 22 °C/71.6 °F, 60%RH)
Paper feed system	One universal cassette and one MP tray
Paper loading capacity	Cassette: 500 sheets (80 g/m2, 0.11 µm) 16~28lb. Bond MP tray: 100 sheets (80 g/m2, 0.11 µm) 16lb. bond~110lb. Index
Paper eject system	Face down: 250 sheets (80 g/m2, 0.11 µm) 20lb., equipped with a face-down paper full sensor Face up: 100 sheets (optional face-up tray PT-301 must be installed)
Photoconductor	OPC drum (diameter 30 mm)
Charging system	Scorotron (positive charging)
Light source	LED
Developing system	Touch down development method Developer: Two-component
Transfer system	Toner replenishing: Automatic from the toner container Primary transfer: Transfer belt (negative-charged) Secondary transfer: Transfer roller (negative-charged)
Separation system	Small radius curvature separation
Fixing system	Heat roller (diameter 36.5 mm, 850 W halogen heater lamp) (Oilless) Press belt
Charge erasing system	Exposure by eraser lamp (LED)
Cleaning system	Drum: Counter blade Primary transfer belt: Fur brush

Specifications (continued)


Controller hardware	CPU: Power PC750CXr (500 MHz) System ROM: 8 MB (32 Mbit × 2) Font ROM: 2 MB (16 Mbit × 1) Main RAM: 128 MB standard (DIMM); expanding up to 640 MB (512 MB × 1) at the maximum by adding optional expansion memory Optional expansion RAM (DIMM): 1 slot 100-pin DIMM (64, 128, 256 or 512 MB)
Interface	10/10BASE TX, USB: Hi-Speed USB Optional interface (KUIO-LV) × 1: Network interface card IB-23 (10 Base-TX/100 Base-TX)
Controller software	a) Emulation PCL6 (PCL5c/PJL/PCL XL protocol class 2.1) KPD3 (PostScript 3 compatible) b) Fonts: Bitmap font: 1 Line Printer bitmap font Outline fonts: 80 PCL fonts 136 KPD3 Fonts c) Graphic: (1) Raster graphic: 75, 100, 150, 200*, 300, 600* dpi (*200 dpi is supported when the resolution is 600 dpi.) (2) Vector graphic: Line, Box, Circle, Arc, Fill pattern etc. (3) Bar code: One-dimensional bar code: 45 types Two-dimensional bar code: 1 type (PDF-417) d) Connectivity: Plug & Play, Windows 95/98/ME/NT4.0/2000/XP SNMP (KM-NET viewer)
Resolution	600 dpi
Dimensions	Main unit: 13 5/8 × 18 1/2" × 15 1/4" (W × D × H)
Weight	Main unit: 55 1/8 lbs (not including toner containers)
Power source	120 V AC, 60 Hz (U.S.A./Canada)
Current	9.2 A (120 V model)
Noise	Printing: 52 dB (A) Ready: 36 dB (A)

BTU's

Model	Power Consumption		PPM	Prints/Hr	Watts based on PPM & Pr/Hr	Watts based on PPM & Pr/Hr	kW/hour	Total BTU (*3421.14)
	Total Print (W)	Total Ready (W)			Print	Ready		
FS-C5015N	446	162	17	500	218.6	82.6	0.3012	1027.8
	446	162	17	1,000	437.3	3.2	0.4404	1502.8
	446	162	17	1,020	446.0	0.0	0.4460	1521.8
FS-C5025N	455	116	22	500	172.3	72.1	0.2444	834.0
	455	116	22	1,000	344.7	28.1	0.3728	1272.1
	455	116	22	1,320	455.0	0.0	0.4550	1552.5

Total BTU's are based on Prints per Minute, Prints per Hour. Watts are based on PPM & Pr/Hr and Kw/Hour.

POWER CONSUMPTION

Specification		Main Body
FS-C5015N Voltage requirements	US/Canada	120 V AC $\pm 10\%$, 60Hz $\pm 2\%$, 9.5A
	Maximum	1098W
	Sleep/Off Mode	16W
	Printing	446W
	Ready	162W
FS-C5025N Voltage requirements	US/Canada	120 V AC $\pm 10\%$, 60Hz $\pm 2\%$, 9.1A
	Maximum	1091W
	Sleep/Off Mode	15W
	Printing	455W
	Ready	116W
		NEMA 5-15R


INSTALLATION REQUIREMENTS

Installation Time	20 Minutes or less (Without accessories)
Standard Temperature	73.4°F (23°C)
Standard Humidity	60%RH (Relative Humidity)
Temperature Range	50°F ~ 90°F (10°C ~ 32.5°C)
Humidity Range	20% ~ 80%RH
Condensation and Humidity	Rapid Temperature change, Humidity drift, and condensation should be avoided
Altitude	Maximum 6500 ft. (2000 meters)
Illumination	Maximum 1,500 lux
Levelness	Maximum levelness: 5mm (0.2inch) The Printer must be placed on a level and sturdy surface

WEIGHT AND DIMENSIONS

Specification	FS-C5015N/C5025N
Width	13 5/8"
Height	15 1/4"
Depth	18 1/2"
Weight (Main unit)	FS-C5015 / 53lbs. FS-C5025 / 55lbs. (including toner containers)

MACHINE SPACE REQUIREMENTS

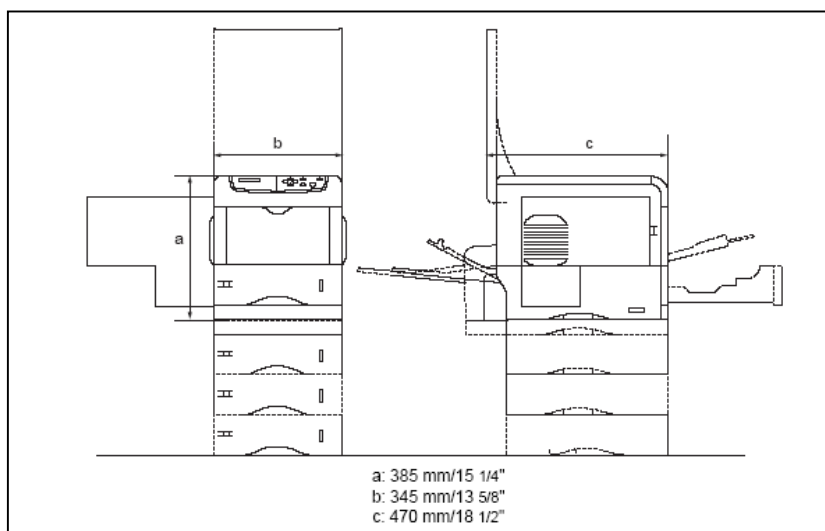

Allow sufficient access for proper operation and maintenance of the machine.

Machine front: 60 cm/26.6"

Machine rear: 25 cm/9.84"

Machine right: 25 cm/9.84"

Machine left: 40 cm/15.7"


Machine top: 75 cm/29.5"

**All Specifications Subject to Change without Notice.*

UTILITIES

NETWORK	Description
KM-NET Viewer	Administrator Utility which monitors Kyocera network devices with the ability to display and report device conditions via e-mail using SMTP.
KM-NET Viewer Web	Server based Utility, similar in nature to KM-NET Viewer using the PC's Web Browser. Designed to support multiple users.
KM-NET for Clients	Remotely displays printer operation panel and manages print jobs stored on the memory/storage devices.
Quick Set-up Utility	Quick Set-up Utility for Network Administrators used to set-up IP Printing and Addresses on Network Printers.
Meter Gateway	MeterGateway allows configuration of meter count notification to be centrally managed from one server/workstation, using KMNW Web. Meter counts from any manufacturer's devices can also be obtained, as long as KMNW Web can monitor these devices.
PRINT	
Color Optimizer	The Color Optimizer is a plug-in developed for the KX Driver. The objective of the Color Optimizer is to help the End User sample and/or select from a variety of color shades that best match the target color on the document to be printed.
KM-NET for Direct Printing	Allows Direct Printing of Adobe PDF's without launching Adobe's Acrobat or Acrobat Reader applications.
PRESCRIBE	
PCL BarCode Flash	One and two Dimensional PCL compatible Barcode Fonts stored on Compact Flash Card technology.
IC Link	Manages PRESCRIBE Forms, Bitmap Fonts, Printable Data Files and API based projects and delivers them to the printer memory storage device (HDD or CF Card).

PRODUCT CONFIGURATION

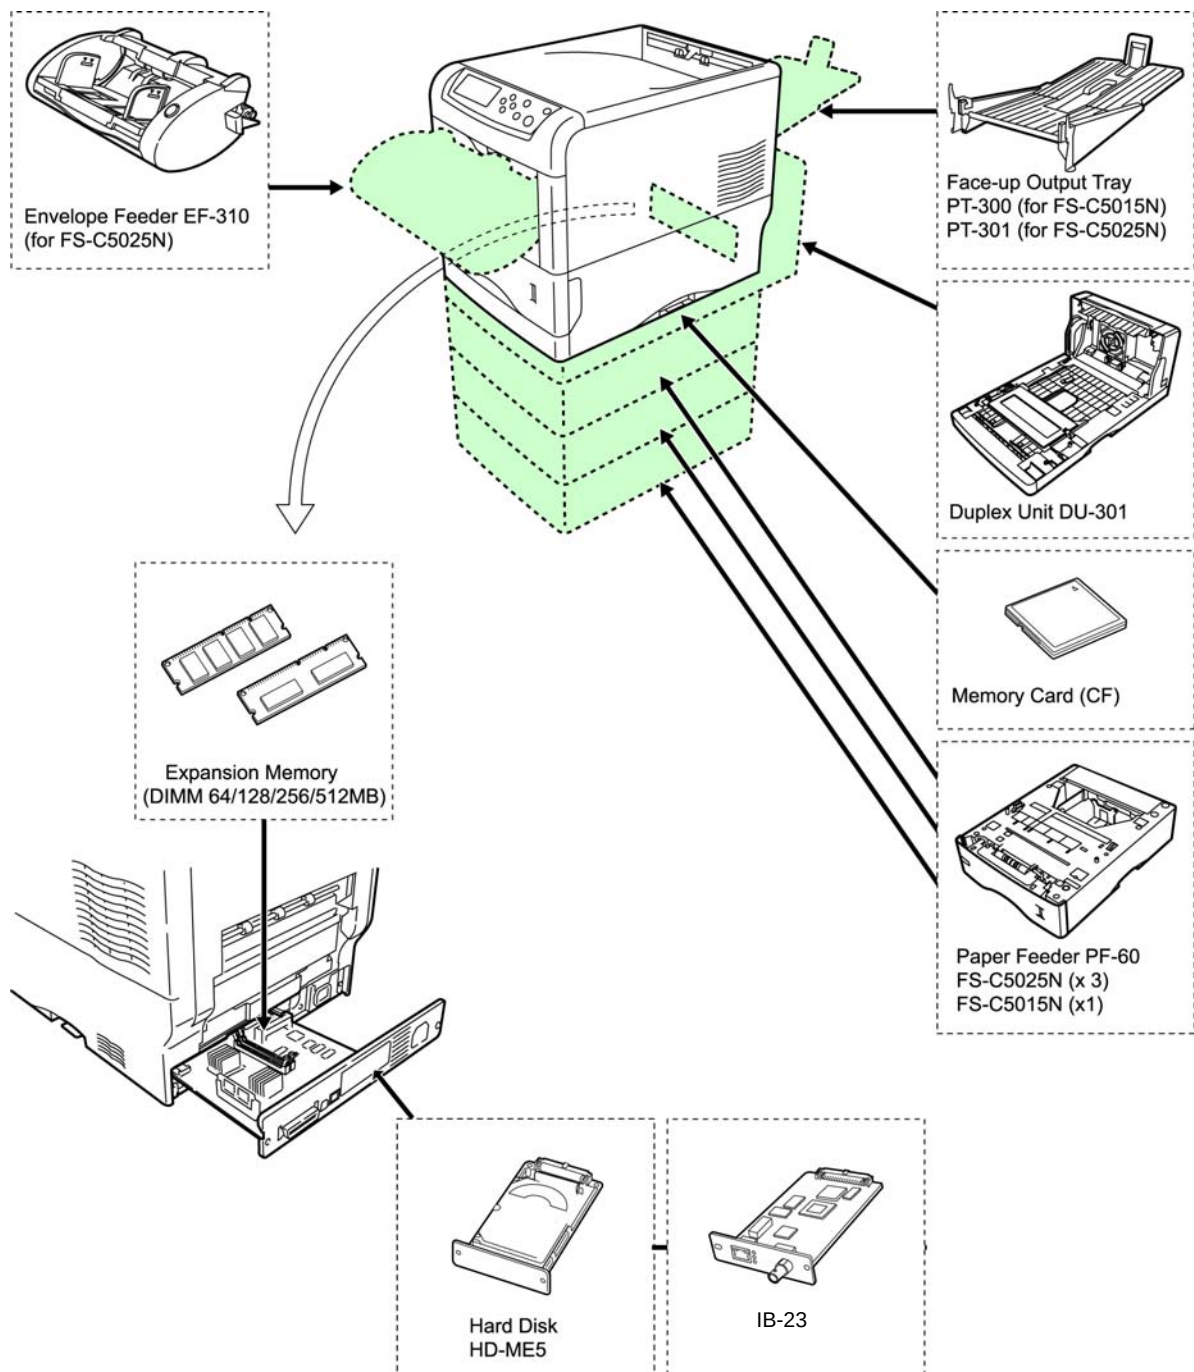

PRODUCT COMPARISION

		FS-C5015N	FS-C5020N	FS-C5025N
Speed (Letter)		17ppm	17ppm	22ppm
CPU		PowerPC 750CX 400MHz	PowerPC 750CX 400MHz	PowerPC 750CX 500MHz
Memory	Standard	128MB	128MB	128MB
	Maximum (Excl.HDD)	640MB: 512MB+128MB	1,024MB: 512MBx2	640MB: 512MB+128MB
	HDD	40GB (OP.)	40GB (OP.)	40GB (OP.)
Resolution *Default		*600 x 600dpi 2bit	600 x 600dpi 2bit	600 x 600dpi 2bit
		600 x 600dpi 4bit	*600 x 600dpi 4bit	*600 x 600dpi 4bit
Paper Input	Standard	500+100	500+100	500+100
	Maximum	1,100: 500 x 2+100	2,100: 500 x 4+100	2,100: 500 x 4+100
Interface	IEEE1284	-	IEEE1284	-
Initial Toner Yield	K	3,000 images	4,000 images	4,000 images
	Y/M/C	2,000 images	4,000 images	4,000 images
Noise	Printing	52dB	53dB	52dB